

BIOMBO SILVER / SILVER FOLDING SCREEN



DESCRIPCIÓN:
Biombo con coeficiente de fono absorción (alfa Sabin medio) 1. Con tejido desmontable, lavable e intercambiable por medio de una cremallera invisible.

De 6 cm. de espesor y dimensiones estándar de 40, 61 y 122 cm. de ancho. Alto de 120 y 150 cm. Sin bastidor.

Pie de apoyo de acero, doble lacado texturizado.

GAMA DE COLORES:
- Pie: en color estándar negro y cualquier Ral bajo pedido.
- Panel: tejido ILUCS.

MATERIALES:
- Espuma:
 · Alta absorción acústica = 1
 · Fuego C-S2-D0
 · Oeko tex 100

- Tejido:
 · ILUCS - Fuego B-S1-D0

APLICACIONES:
Separación de espacios en lugares de trabajo, con una reducción significativa sonora.

DIMENSIONES
MEASURES


ANCHO WIDTH	ALTURA HEIGHT	m2 ABSOR.	HERRAJES BRACKETS
40 cm	120 cm	0,96 m2	1 ud
40 cm	150 cm	1,20 m2	1 ud
60 cm	120 cm	1,44 m2	1 ud
60 cm	150 cm	1,80 m2	1 ud
120 cm	120 cm	2,88 m2	1 ud
120 cm	150 cm	3,60 m2	1 ud

DESCRIPTION: Room divider with sound absorption coefficient (average alpha Sabin) 1. With removable fabric, washable and interchangeable thanks to a hidden zipper. | 6cm thick, standard dimensions: 40, 61 and 122 cm. wide, 120-150 cm. high. No frame. | Textured, double-coating iron support.

COLOR RANGE: - Support: standard black and any Ral colors upon request. | - Screen: fabric ILUCS.

MATERIALS: - Foam: - High sound absorption = 1 | - Fire coefficient C-S2-D0 | - Deko - tex 100
- Fabric: ILUCS - Fire coefficient B-S1-D0

USES: Dividing spaces at the workplace while reducing noise significantly.

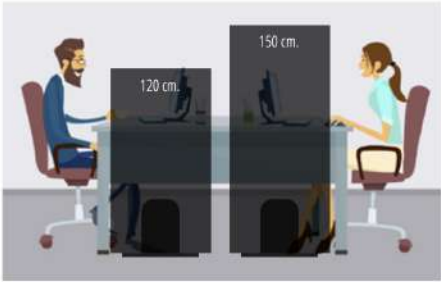

f (Hz)	α_s	α_p
100	0,15	0,30
125	0,32	
160	0,39	
200	0,79	
250	0,92	0,90
315	1,05	
400	1,11	
500	1,07	1,00
630	1,05	
800	1,02	1,00
1000	1,03	
1250	1,06	1,00
1600	1,06	
2000	1,10	
2500	1,17	1,00
3150	1,22	
4000	1,26	1,00
5000	1,29	

Weighted sound absorption coefficient according to EN ISO 11654:1997
 $\alpha_w = 1,00$

