

DIVISORIA SILVER / SILVER DIVIDER



DESCRIPCIÓN:

Divisoria de mesa con coeficiente de fono absorción (alfa Sabin medio) 0,8.
De 4 cm. de espesor y dimensiones estándar de 5cm menos de ancho de mesa. Alto de 40 y 61 cm. Sin bastidor.
Con tejido desmontable, lavable e intercambiable por medio de una cremallera invisible.

GAMA DE COLORES:

- Pie: en color estándar negro y cualquier Ral bajo pedido.
- Panel: tejido ILUCS.

MATERIALES:

- Espuma: Alta absorción acústica = 0,8 | Fuego C-S2-D0 | Oeko - tex 100
- Tejido: ILUCS | Fuego B-S1-D0

APLICACIONES:

Separación de puestos de trabajo, con una reducción significativa sonora.




DESCRIPTION: Desk divider with sound absorption coefficient (average alpha Sabine) 0.8. | 4cm thick, standard dimensions: 5 cm less than desk width. 40-61 cm. high. No frame. With detachable fabric, washable and interchangeable thanks to a hidden zipper.

COLOR RANGE: Support: standard black and any Ral colors upon request. | Screen: fabric ILUCS.

MATERIALS: - Foam: · High sound absorption = 0.8 | · Fire coefficient C-S2-D0 | · Oeko - tex 100.
- Fabric: ILUCS | · Fire coefficient B-S1-D0

USES: Dividing work areas while reducing noise significantly.

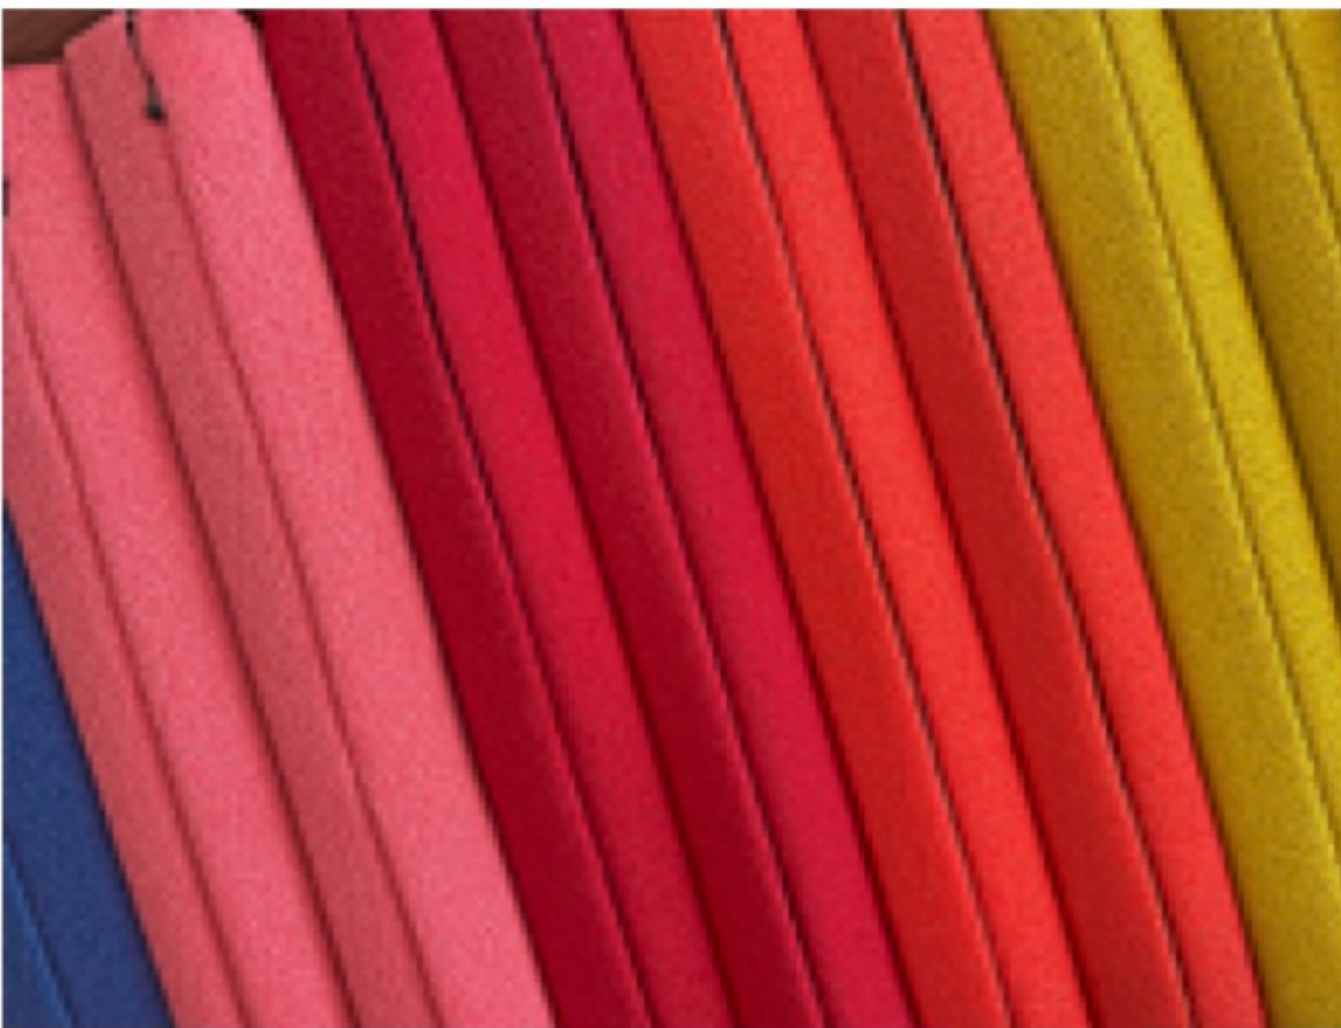

DIMENSIONES DIMENSIONS

VER, NO OIR
DO SEE, DO NOT HEAR

MESA TABLE	ANCHO WIDTH	ALTURA HEIGHT	m2 ABSOR.
70	65 cm	40 cm	0,52 m2
80	75 cm	40 cm	0,60 m2
90	85 cm	40 cm	0,68 m2
100	95 cm	40 cm	0,76 m2
120	115 cm	40 cm	0,92 m2
140	135 cm	40 cm	1,08 m2
160	155 cm	40 cm	1,24 m2
180	2ud x 90	40 cm	1,36 m2
200	2ud x 100	40 cm	1,52 m2




NO VER, NO OIR
DO NOT SEE, DO NOT HEAR

MESA TABLE	ANCHO WIDTH	ALTURA HEIGHT	m2 ABSOR.
70	65 cm	61 cm	0,79 m2
80	75 cm	61 cm	0,92 m2
90	85 cm	61 cm	1,04 m2
100	95 cm	61 cm	1,16 m2
120	115 cm	61 cm	1,40 m2
140	135 cm	61 cm	1,65 m2
160	155 cm	61 cm	1,89 m2
180	2ud x 90	61 cm	2,07 m2
200	2ud x 100	61 cm	2,32 m2



f (Hz)	T ₁	T ₂	α _s	α _p
100	8.17	6.39	0.10	0.20
125	7.73	4.99	0.20	
160	9.18	4.51	0.32	
200	9.51	3.85	0.43	0.50
250	9.38	3.60	0.48	
315	8.27	3.01	0.59	
400	8.35	2.47	0.80	0.95
500	8.89	2.13	1.00	
630	8.47	2.00	1.07	
800	7.98	1.91	1.11	1.00
1000	7.56	1.74	1.24	
1250	6.82	1.60	1.34	
1600	6.07	1.52	1.38	1.00
2000	5.26	1.47	1.38	
2500	4.37	1.42	1.35	
3150	3.45	1.34	1.31	1.00
4000	2.73	1.21	1.34	
5000	2.02	1.09	1.26	

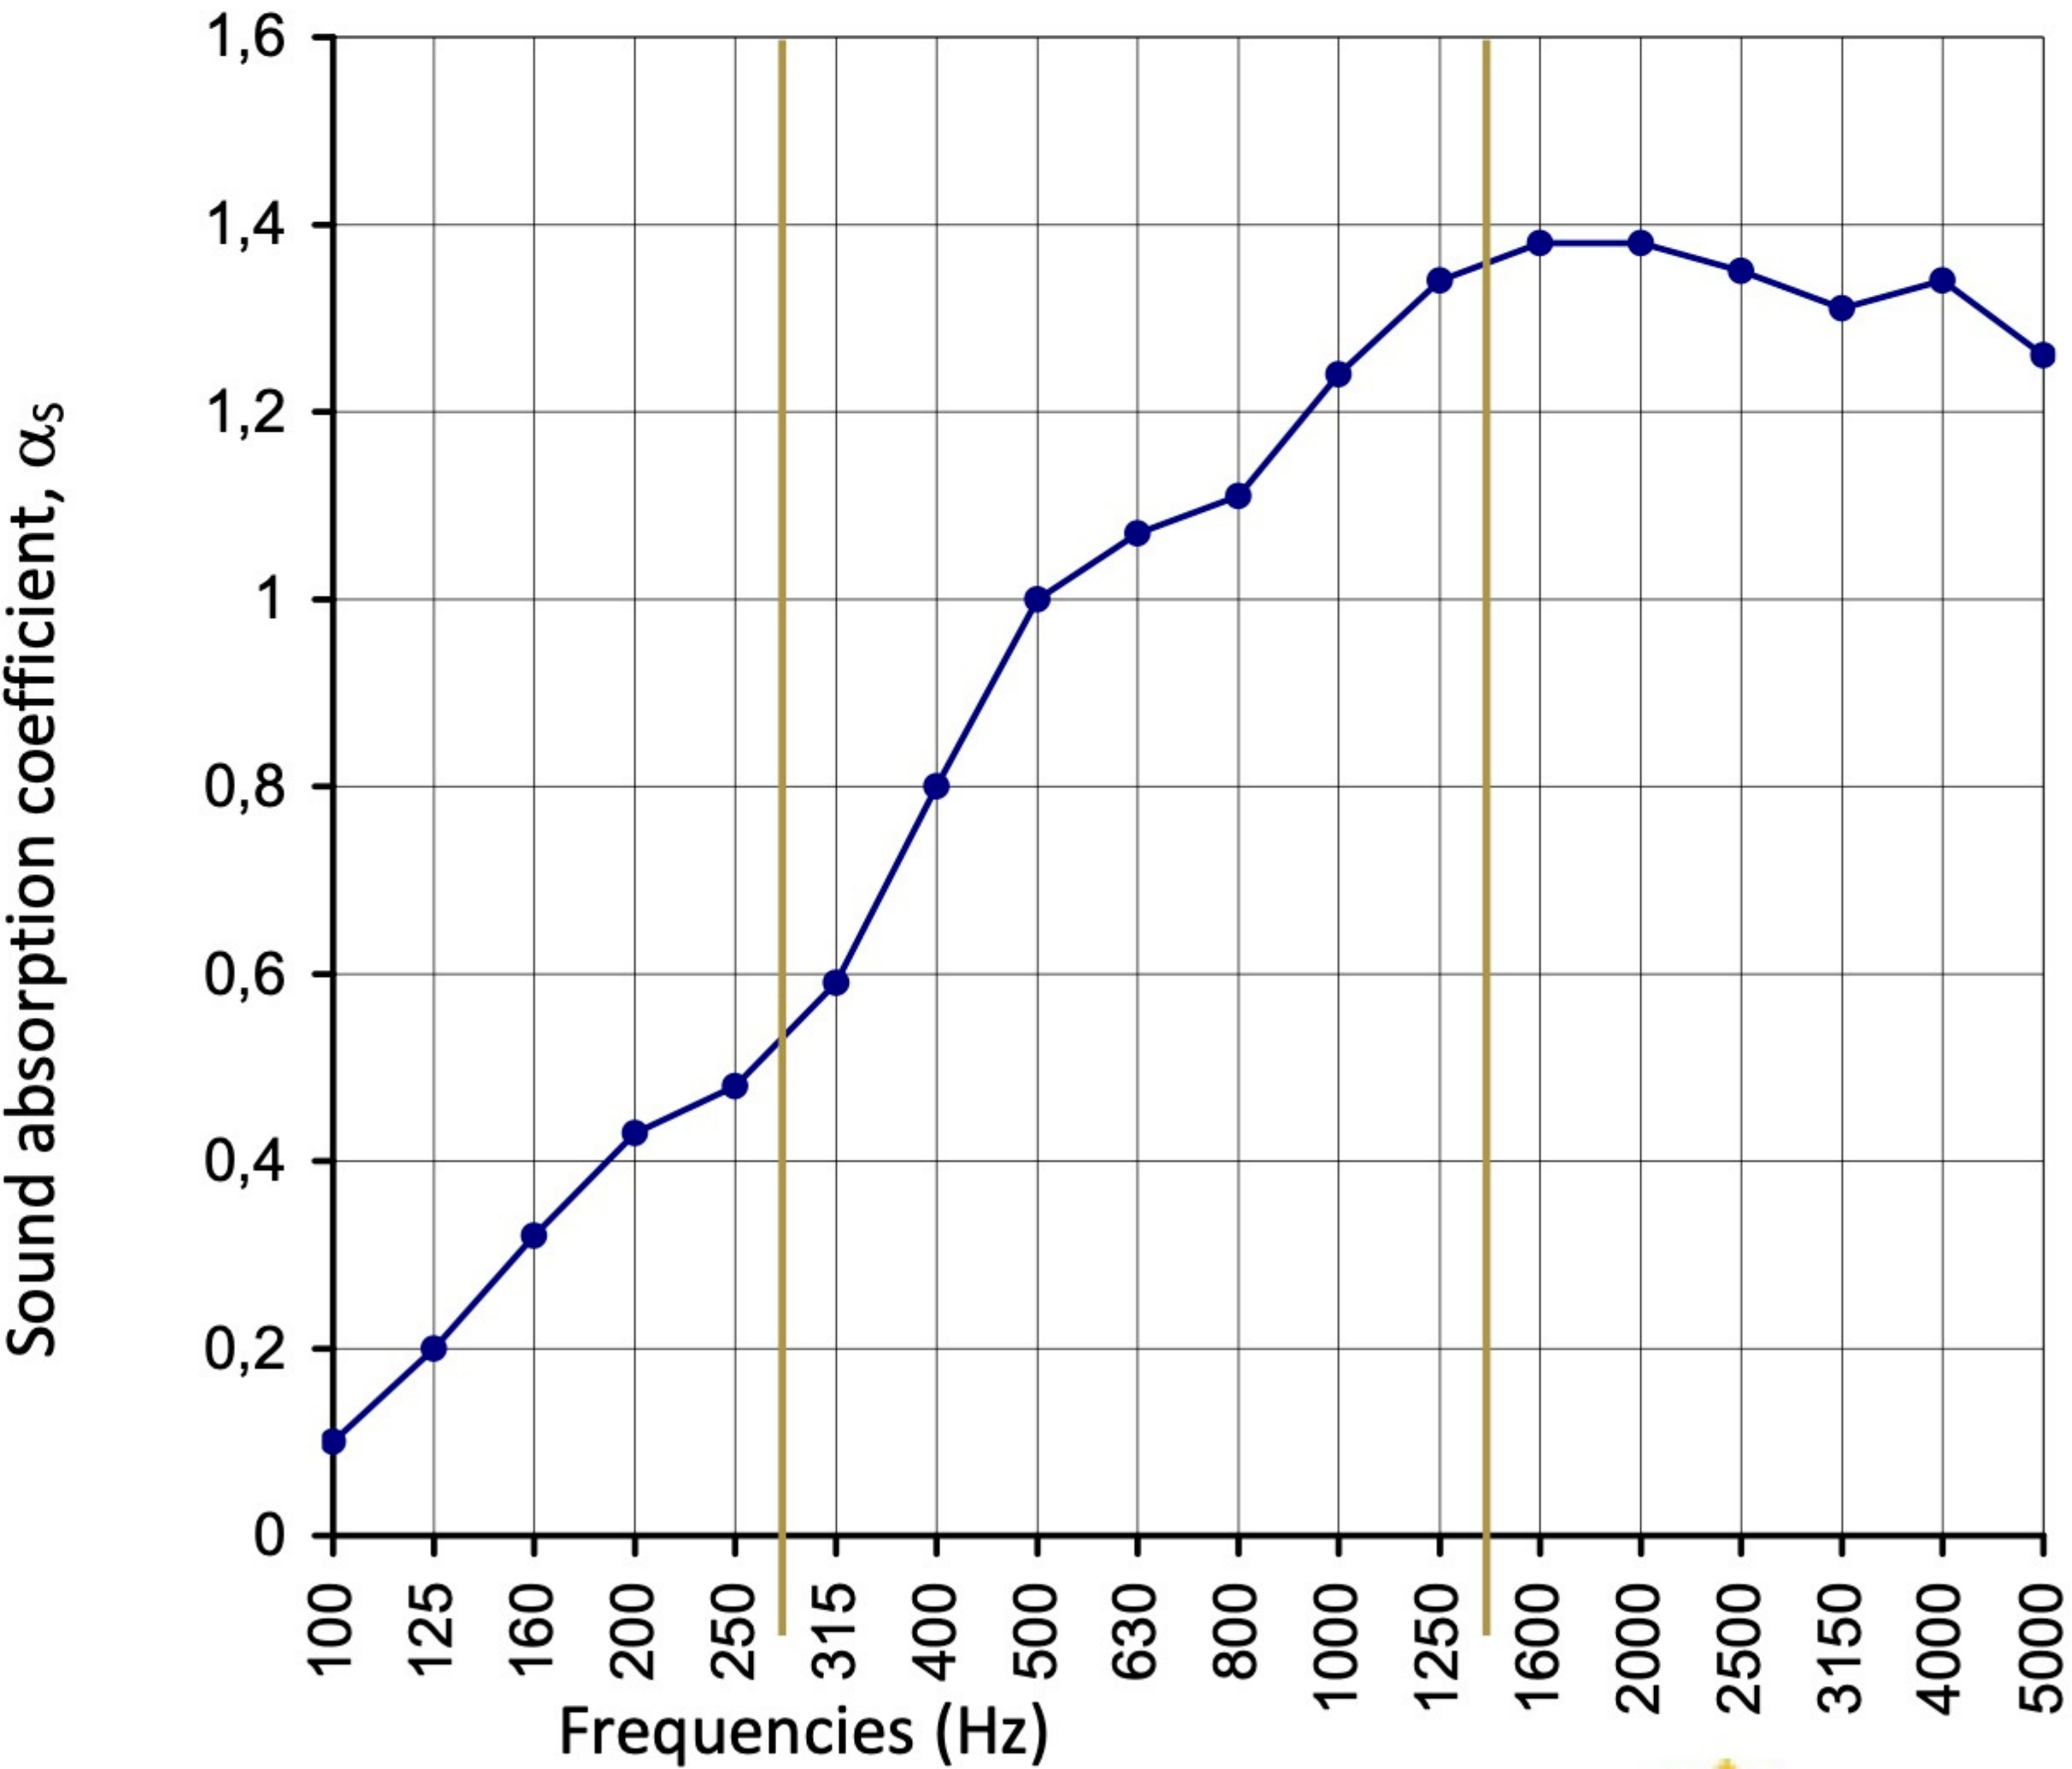

Evaluation according to EN ISO 11654:1997:

Weighted sound absorption coefficient: α_w = 0.80 (H)

Evaluation based on laboratory measurement obtained by an engineering method.

